

**arneg**

www.arneg.it

# Panama 3



Vertical Multi-deck



Semi-vertical



YOUR NATURALLY INNOVATIVE PARTNER FOR RETAIL SOLUTIONS

into the World

# Panama 3

Verticale multi ripiano  
Vertical multi deck

Lunghezza senza spalle  
Length without ends  
Länge ohne Seiten  
Longeur sans joues  
Longitud sin laterales  
Длина без боковин



Temperatura di esercizio  
Working temperature  
Betriebstemperatur  
Temp. de fonctionnement  
Temperatura de trabajo  
Рабочая температура

Superficie di esposizione frontale  
Opening display surface  
Sichtbare Ausstellfläche  
Surface d'exposition frontale  
Superficie de exposición frontal  
Лицевая площадь экспозиции

Superficie di esposizione orizzontale  
Horizontal display surface  
Gesamte Ausstellfläche  
Surface d'exposition horizontale  
Superficie de exposición de apoyo  
Горизонтальная площадь экспозиции

Capacità utile  
Net volume  
Nutzleistung  
Capacité utile  
Capacidad útil  
Полезный объем

		mm	°C	m <sup>2</sup>		dm <sup>3</sup>
203	065	1250	0°C / +2°C +2°C / +4°C +4°C / +6°C	1,93	2,30	717
		1875		2,90	3,45	1076
		2500		3,86	4,60	1435
		3750		5,79	6,90	2152
	070	1250		1,93	2,61	816
		1875		2,90	3,92	1224
		2500		3,86	5,22	1631
		3750		5,79	7,83	2447
	075	1250		1,93	2,92	914
		1875		2,90	4,39	1371
		2500		3,86	5,85	1828
		3750		5,79	8,77	2742
	080	1250		1,93	3,24	1012
		1875		2,90	4,85	1518
		2500		3,86	6,47	2024
		3750		5,79	9,71	3037
	085	1250		1,93	3,30	1029
		1875		2,90	4,95	1543
		2500		3,86	6,60	2058
		3750		5,79	9,90	3087
	090	1250		1,93	3,36	1046
		1875		2,90	5,04	1568
		2500		3,86	6,72	2091
		3750		5,79	10,08	3137
216	065	1250	+2°C / +4°C +4°C / +6°C	2,09	2,30	774
		1875		3,14	3,45	1162
		2500		4,19	4,60	1549
		3750		6,28	6,90	2323
	070	1250		2,09	2,61	881
		1875		3,14	3,92	1321
		2500		4,19	5,22	1762
		3750		6,28	7,83	2642
	075	1250		2,09	2,92	987
		1875		3,14	4,39	1481
		2500		4,19	5,85	1974
		3750		6,28	8,77	2962
	080	1250		2,09	3,24	1094
		1875		3,14	4,85	1640
		2500		4,19	6,47	2187
		3750		6,28	9,71	3281
	085	1250		2,09	3,30	1110
		1875		3,14	4,95	1665
		2500		4,19	6,60	2221
		3750		6,28	9,90	3331
	090	1250		2,09	3,36	1127
		1875		3,14	5,04	1691
		2500		4,19	6,72	2254
		3750		6,28	10,08	3381

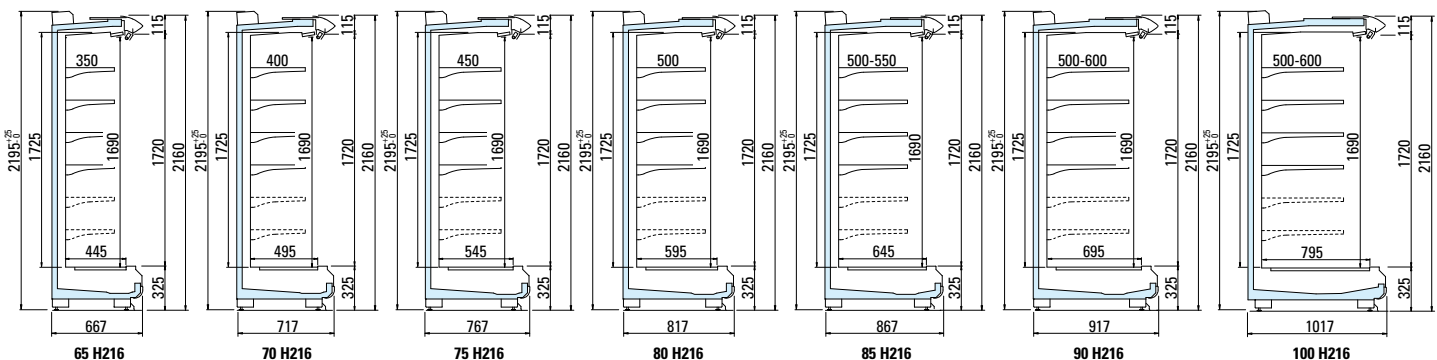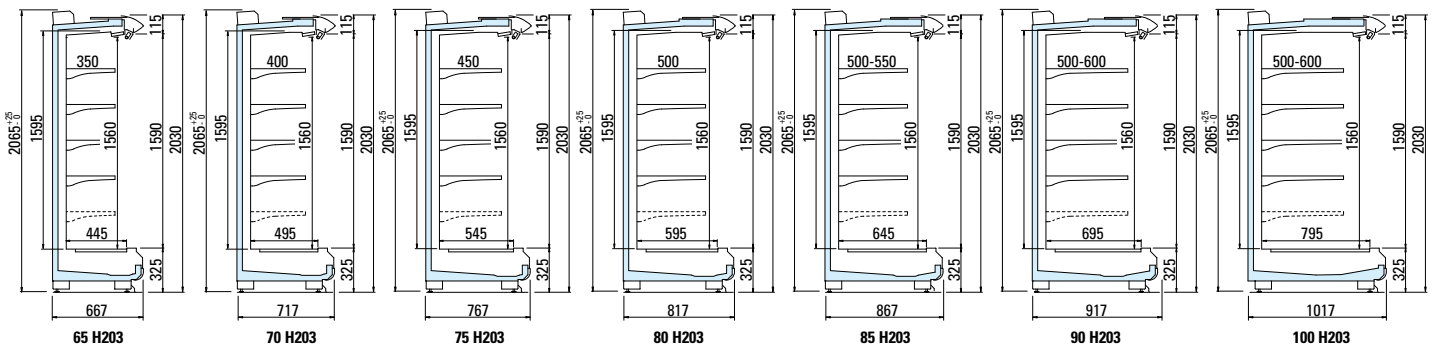

Fascia superiore a becco  
Front curved trim



Fascia inferiore  
Front base

# Panama 3 GL

Verticale multi ripiano  
Vertical multi deck

Lunghezza senza spalle  
Length without ends  
Länge ohne Seiten  
Longeur sans joues  
Longitud sin laterales  
Длина без боковин



Temperatura di esercizio  
Working temperature  
Betriebstemperatur  
Temp. de fonctionnement  
Temperatura de trabajo  
Рабочая температура

Superficie di esposizione frontale  
Opening display surface  
Sichtbare Ausstellfläche  
Surface d'exposition frontale  
Superficie de exposición frontal  
Лицевая площадь экспозиции

Superficie di esposizione orizzontale  
Horizontal display surface  
Gesamte Ausstellfläche  
Surface d'exposition horizontale  
Superficie de exposición de apoyo  
Горизонтальная площадь экспозиции

Capacità utile  
Net volume  
Nutzleistung  
Capacité utile  
Capacidad útil  
Полезный объем

		mm	°C	m <sup>2</sup>		dm <sup>3</sup>
GL	203	065	1250	1,74	2,05	636
		1875	2,61	3,07	954	
		2500	3,49	4,10	1272	
		3750	5,23	6,15	1908	
		070	1250	1,74	2,36	734
			1875	2,61	3,54	1101
			2500	3,49	4,72	1468
			3750	5,23	7,08	2202
		075	1250	1,74	2,67	832
			1875	2,61	4,01	1249
			2500	3,49	5,35	1665
			3750	5,23	8,02	2497
	080	1250	1,74	2,99	931	
		1875	2,61	4,48	1396	
		2500	3,49	5,97	1861	
		3750	5,23	8,96	2792	
	085	1250	1,74	3,30	1029	
		1875	2,61	4,95	1543	
		2500	3,49	6,60	2058	
		3750	5,23	9,90	3087	
	090	1250	1,91	3,36	1046	
		1875	2,86	5,04	1568	
		2500	3,81	6,72	2091	
		3750	5,72	10,08	3137	
	216	065	1250	1,91	2,05	685
			1875	2,86	3,07	1027
			2500	3,81	4,10	1370
			3750	5,72	6,15	2054
070		1250	1,91	2,36	791	
		1875	2,86	3,54	1187	
		2500	3,81	4,72	1582	
		3750	5,72	7,08	2374	
075		1250	1,91	2,67	898	
		1875	2,86	4,01	1346	
		2500	3,81	5,35	1795	
		3750	5,72	8,02	2693	
080	1250	1,91	2,99	1004		
	1875	2,86	4,48	1506		
	2500	3,81	5,97	2008		
	3750	5,72	8,96	3012		
085	1250	1,91	3,30	1110		
	1875	2,86	4,95	1665		
	2500	3,81	6,60	2221		
	3750	5,72	9,90	3331		
090	1250	1,91	3,36	1127		
	1875	2,86	5,04	1691		
	2500	3,81	6,72	2254		
	3750	5,72	10,08	3381		

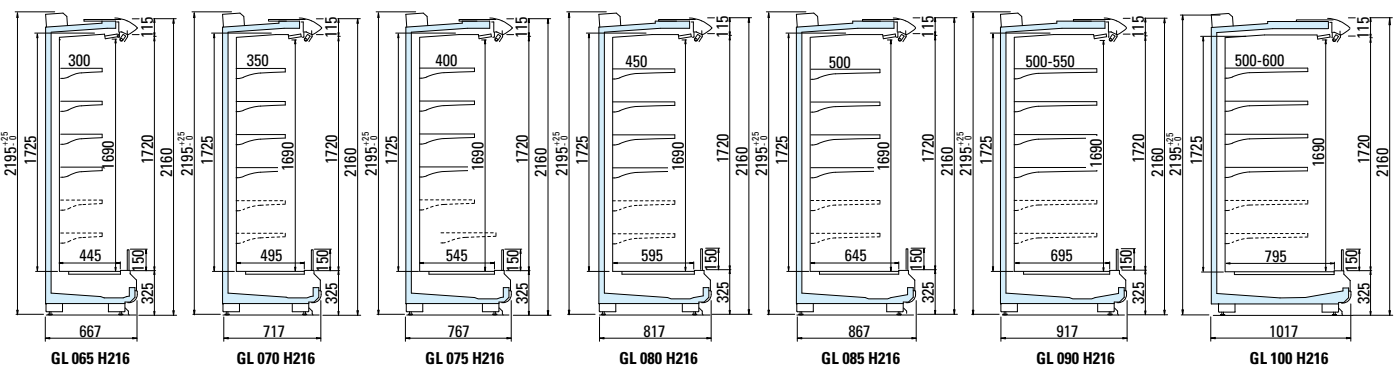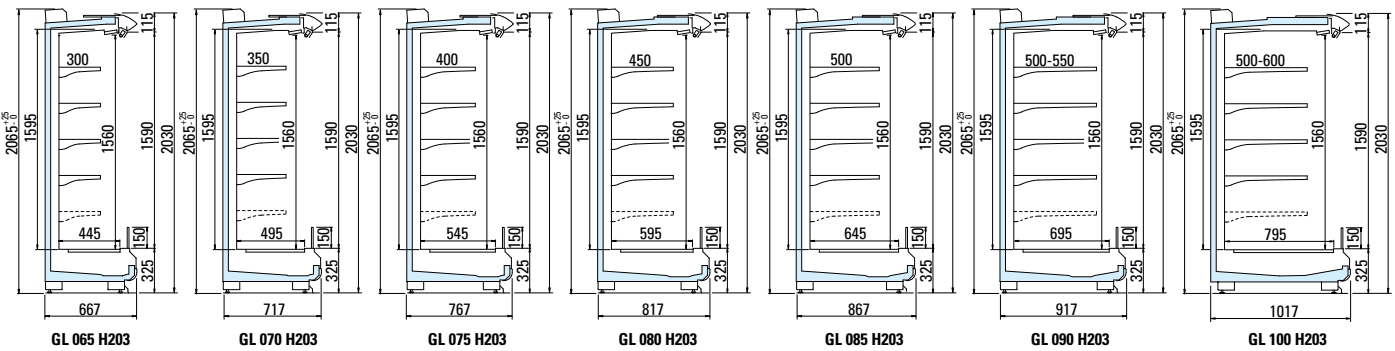

GL  
Vetro frontale inferiore  
Lower front glass

# Panama 3

Semi-verticale  
Semi-vertical

Lunghezza senza spalle  
Length without ends  
Länge ohne Seiten  
Longeur sans joues  
Longitud sin laterales  
Длина без боковин



Temperatura di esercizio  
Working temperature  
Betriebstemperatur  
Temp. de fonctionnement  
Temperatura de trabajo  
Рабочая температура

Superficie di esposizione frontale  
Opening display surface  
Sichtbare Ausstellefläche  
Surface d'exposition frontale  
Superficie de exposición frontal  
Лицевая площадь экспозиции

Superficie di esposizione orizzontale  
Horizontal display surface  
Gesamte Ausstellefläche  
Surface d'exposition horizontale  
Superficie de exposición de apoyo  
Горизонтальная площадь экспозиции

Capacità utile  
Net volume  
Nutzleistung  
Capacité utile  
Capacidad útil  
Полезный объем

		mm	°C	m <sup>2</sup>		dm <sup>3</sup>
065	H125	1250	0°C / +2°C +2°C / +4°C	0,93	1,43	276
		1875		1,40	2,14	414
		2500		1,86	2,86	552
		3750		2,79	4,29	827
		1250		0,93	1,49	289
1875		1,40		2,24	433	
2500		1,86		2,99	577	
3750		2,79		4,48	866	
1250		0,93		1,56	301	
1875		1,40		2,33	452	
2500	1,86	3,11		603		
3750	2,79	4,67		904		
1250	0,93	1,68		327		
1875	1,40	2,52		490		
2500	1,86	3,36		654		
3750	2,79	5,04		981		
1250	0,93	1,81		353		
1875	1,40	2,71		529		
2500	1,86	3,61		705		
3750	2,79	5,42		1058		
1250	0,93	1,87	365			
1875	1,40	2,80	548			
2500	1,86	3,74	731			
3750	2,79	5,61	1096			
1250	1,24	1,87	366			
1875	1,86	2,80	548			
2500	2,49	3,74	731			
3750	3,73	5,61	1097			
1250	1,24	1,93	378			
1875	1,86	2,90	567			
2500	2,49	3,86	757			
3750	3,73	5,79	1135			
1250	1,24	1,99	391			
1875	1,86	2,99	587			
2500	2,49	3,99	782			
3750	3,73	5,98	1173			
1250	1,24	2,12	429			
1875	1,86	3,18	644			
2500	2,49	4,24	859			
3750	3,73	6,36	1288			
1250	1,24	2,31	455			
1875	1,86	3,46	683			
2500	2,49	4,61	910			
3750	3,73	6,92	1365			
1250	1,24	2,37	468			
1875	1,86	3,55	702			
2500	2,49	4,74	936			
3750	3,73	7,11	1405			

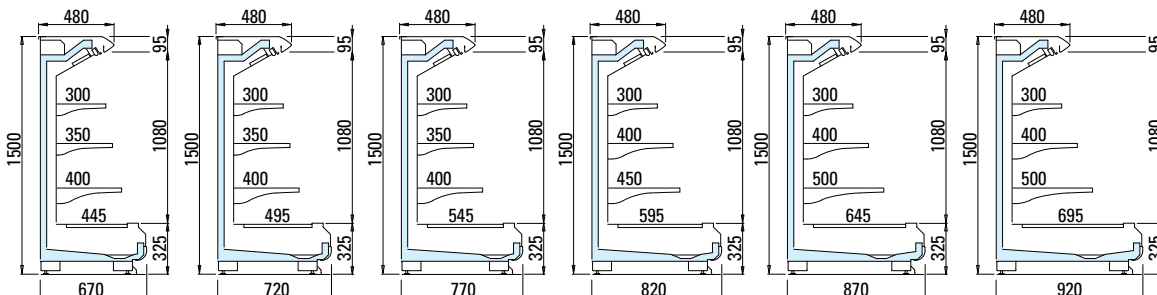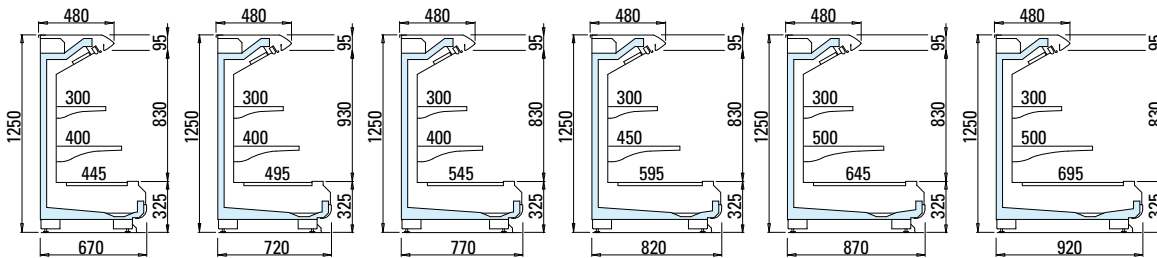

Testate Head-cases		Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione frontale Opening display surface Sichtbare Ausstellfläche Surface d'exposition frontale Superficie de exposición frontal Лицевая площадь экспозиции	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Capacità utile Net volume Nutzleistung Capacité utile Capacidad útil Полезный объём
P		mm	°C	m <sup>2</sup>		dm <sup>3</sup>
065	H125	1426	0°C / +2°C +2°C / +4°C	0,93	1,55	301
		1509		0,99	1,66	321
		1676		1,12	1,86	362
		1850		1,17	2,08	404
070		1509		0,99	1,66	321
		1676		1,12	1,86	362
		1850		1,17	2,08	404
075		1676		1,12	1,86	362
		1850		1,17	2,08	404
080		1676		1,12	1,86	362
		1850		1,17	2,08	404
085		1850		1,17	2,08	404
090	1850	1,17	2,08	404		
065	H150	1426	0°C / +2°C +2°C / +4°C	1,24	1,55	391
		1509		1,32	1,66	417
		1676		1,49	1,86	469
		1850		1,66	2,08	524
070		1509		1,32	1,66	417
		1676		1,49	1,86	469
		1850		1,66	2,08	524
075		1676		1,49	1,86	469
		1850		1,66	2,08	524
080		1676		1,49	1,86	469
		1850		1,66	2,08	524
085		1850		1,66	2,08	524
090	1850	1,66	2,08	524		

