

arneg

www.arneg.it

Serve-over counters

Venezia 2



YOUR NATURALLY INNOVATIVE PARTNER FOR RETAIL SOLUTIONS

into the World


Venezia 2	Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Modello Modell Modell Modelo Modelo Модель			Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Volume netto Net volume Nutzleistung Capacité utile Capacidad útil Полезный объем	
		REMOTO REMOTE		+ UCE WITH UNIT			vetrina display surface	riserva storage
		pannello frontale inferiore lower front panel	gambe legs	pannello frontale inferiore lower front panel				
		mm					°C	m ²
VCA con riserva with storage	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	111	98,0
	1250	•	•	•		1,05	148	131
	1875	•	•	•		1,58	222	197
	2500	•	•	•		2,11	296	263
	3125	•	•	•		2,64	370	328
	3750	•	•	•		3,17	444	394
	AA4	•	•	•		0,60	77,0	-
	AA9	•	•	•		1,20	151	-
	AC4	•	•	•		0,50	72,0	-
AC9	•	•	•	1,10	142	-		
VCB con riserva with storage	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	111	98,0
	1250	•	•	•		1,05	148	131
	1875	•	•	•		1,58	222	197
	2500	•	•	•		2,11	296	263
	3125	•	•	•		2,64	370	328
	3750	•	•	•		3,17	444	394
	AA4	•	•	•		0,60	77,0	-
	AA9	•	•	•		1,20	151	-
	AC4	•	•	•		0,50	72,0	-
AC9	•	•	•	1,10	142	-		
VCB SELF con riserva with storage	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	111	98,0
	1250	•	•	•		1,05	148	131
	1875	•	•	•		1,58	222	197
	2500	•	•	•		2,11	296	263
	3125	•	•	•		2,64	370	328
	3750	•	•	•		3,17	444	394
	AA4	•	•	•		0,60	77,0	-
	AA9	•	•	•		1,20	151	-
	AC4	•	•	•		0,50	72,0	-
AC9	•	•	•	1,10	142	-		
VCA - VCB MAXI	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	198	
	1250	•	•	•		1,06	264	
	1875	•	•	•		1,58	396	
	2500	•	•	•		2,11	528	
	3125	•	•	•		2,64	660	
	3750	•	•	•		3,17	792	
	AA4	•	•	•		0,60	153	
	AA9	•	•	•		1,20	300	
	AC4	•	•	•		0,50	141	
AC9	•	•	•	1,10	282			
VCB MAXI SELF	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	198	
	1250	•	•	•		1,06	264	
	1875	•	•	•		1,58	396	
	2500	•	•	•		2,11	528	
	3125	•	•	•		2,64	660	
	3750	•	•	•		3,17	792	
	AA4	•	•	•		0,60	153	
	AA9	•	•	•		1,20	300	
	AC4	•	•	•		0,50	141	
AC9	•	•	•	1,10	282			
VCA FH	937	•	•	•	0°C / +2°C	0,70	73,0	
	1250	•	•	•		0,94	98,0	
	1875	•	•	•		1,41	148	
	2500	•	•	•		1,88	196	
	3750	•	•	•		2,82	294	
VCB FH	937	•	•	•	0°C / +2°C	0,70	73,0	
	1250	•	•	•		0,94	98,0	
	1875	•	•	•		1,41	148	
	2500	•	•	•		1,88	196	
	3750	•	•	•		2,82	294	
VCB SELF FH	937	•	•	•	0°C / +2°C	0,70	73,0	
	1250	•	•	•		0,94	98,0	
	1875	•	•	•		1,41	148	
	2500	•	•	•		1,88	196	
	3750	•	•	•		2,82	294	
VCA BT	1250	•	•	-	-18°C / -25°C	1,05	319	
	1875	•	•	-		1,58	479	
	2500	•	•	-		2,10	638	
	3750	•	•	-		3,15	958	
VCA TCBM	937	•	•	-	+65°C	0,54	80	
	1250	•	•	-		0,76		
VCA TCPW	937	•	•	-	+65°C	0,54	80	
	1250	•	•	-		0,76		
VC H125	1250	•	•	-	0°C / +2°C +2°C / +4°C	1,54	420	
	1875	•	•	-		3,09	630	
	2500	•	•	-		4,12	840	
	3750	•	•	-		4,63	1260	
VC H150	1250	•	•	-	0°C / +2°C +2°C / +4°C	2,17	550	
	1875	•	•	-		3,25	825	
	2500	•	•	-		4,34	1100	
	3750	•	•	-		6,51	1650	

Venezia 2	Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Modello Model Modell Modelo Modelo Модель			Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellungsfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Volume netto Net volume Nutzleistung Capacité utile Capacidad útil Полезный объем	
		REMOTO REMOTE		+ UCE WITH UNIT			vetrina display surface	riserva storage
		pannello frontale inferiore lower front panel	gambe legs	pannello frontale inferiore lower front panel				
		mm					°C	m ²
VDA con riserva with storage	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	111	98,0
	1250	•	•	•		1,05	148	131
	1875	•	•	•		1,58	222	197
	2500	•	•	•		2,11	296	263
	3125	•	•	•		2,64	370	328
	3750	•	•	•		3,17	444	394
	AA4	•	•	•		0,60	77,0	-
	AA9	•	•	•		1,20	151	-
	AC4	•	•	•		0,50	72,0	-
AC9	•	•	•	1,10	142	-		
VDB SELF con riserva with storage	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	111	98,0
	1250	•	•	•		1,05	148	131
	1875	•	•	•		1,58	222	197
	2500	•	•	•		2,11	296	263
	3125	•	•	•		2,64	370	328
	3750	•	•	•		3,17	444	394
	AA4	•	•	•		0,60	77,0	-
	AA9	•	•	•		1,20	151	-
	AC4	•	•	•		0,50	72,0	-
AC9	•	•	•	1,10	142	-		
VDA MAXI	937	•	•	•	0°C / +2°C +2°C / +4°C	0,79	198	
	1250	•	•	•		1,06	264	
	1875	•	•	•		1,58	396	
	2500	•	•	•		2,11	528	
	3125	•	•	•		2,64	660	
	3750	•	•	•		3,17	792	
	AA4	•	•	•		0,60	153	
	AA9	•	•	•		1,20	300	
	AC4	•	•	•		0,50	141	
AC9	•	•	•	1,10	282			
VDB MAXI SELF	937	•	•	•	0°C / +2°C	0,79	198	
	1250	•	•	•		1,06	264	
	1875	•	•	•		1,58	396	
	2500	•	•	•		2,11	528	
	3125	•	•	•		2,64	660	
	3750	•	•	•		3,17	792	
	AA4	•	•	•		0,60	153	
	AA9	•	•	•		1,20	300	
	AC4	•	•	•		0,50	141	
AC9	•	•	•	1,10	282			
VDA FH	937	•	•	•	0°C / +2°C	0,70	73,0	
	1250	•	•	•		0,94	98,0	
	1875	•	•	•		1,41	148	
	2500	•	•	•		1,88	196	
	3750	•	•	•		2,82	294	
VDB SELF FH	937	•	•	•	0°C / +2°C	0,70	73,0	
	1250	•	•	•		0,94	98,0	
	1875	•	•	•		1,41	148	
	2500	•	•	•		1,88	196	
	3750	•	•	•		2,82	294	
VDA BT	1250	•	•	-	-18°C / -25°C	1,05	319	
	1875	•	•	-		1,58	479	
	2500	•	•	-		2,10	638	
	3750	•	•	-		3,15	958	
VDA TCBM	937	•	•	-	+65°C	0,54	80	
	1250	•	•	-		0,76		
VDA TCPW	937	•	•	-	+65°C	0,54	80	
	1250	•	•	-		0,76		
VD H125	1250	•	•	-	0°C / +2°C +2°C / +4°C	1,54	420	
	1875	•	•	-		3,09	630	
	2500	•	•	-		4,12	840	
	3750	•	•	-		4,63	1260	
VD H150	1250	•	•	-	0°C / +2°C +2°C / +4°C	2,17	550	
	1875	•	•	-		3,25	825	
	2500	•	•	-		4,34	1100	
	3750	•	•	-		6,51	1650	

• Disponibile; Available

- Non disponibile; Not available

Venezia 2

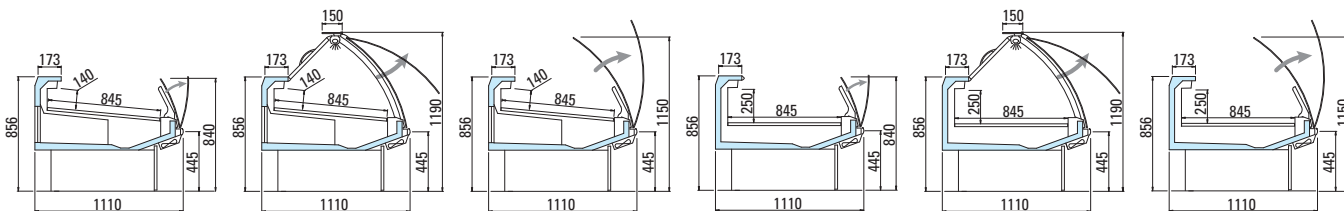

VCB SELF
riserva/storage


VCA
riserva/storage

VCB
riserva/storage


VCB MAXI SELF

VCA MAXI


VCB MAXI




VCB SELF FH




VCA FH




VCB FH




VCA BT




VCA TCBM




VCA TCPW




VC H125




VC H150




VDB SELF
riserva/storage




VDA
riserva/storage




VDB MAXI SELF




VDA MAXI




VDB SELF FH




VDA FH




VDA BT




VDA TCBM




VDA TCPW




VD H125




VD H150




AA4



AC4



AA9



AC9



ARNEG S.p.A. - Via Venezia, 58 - 35010 Campo San Martino (PD) Italy - Tel. +39 049 9699333 - Fax +39 049 9699444 - RAEE IT801000000139
 Certified ISO 9001:2008 - ISO 14001:2004 - ISO 50001:2011 - B50HSAS 18001:2007

Contenuto modificabile senza preavviso. Inhalt Veränderbar ohne Vorankündigung. Contenu modifiable sans préavis. Contenido modificable sin previo aviso. Содержание изменяется без предупреждения